





A-I SCAFFOLD MFG., INC.

590 Commerce Parkway | Hays, KS 67601
Ph 785.621.5121 | Fax 785.621.5122
www.a1scaffoldmfg.com

Slab Grabber



- **Adjusts from 0" to 36"**
- **No squatting or bending required**
- **Easy set up and tear down**
- **Also known as a Perimeter Guard Rail Post or Stantion**

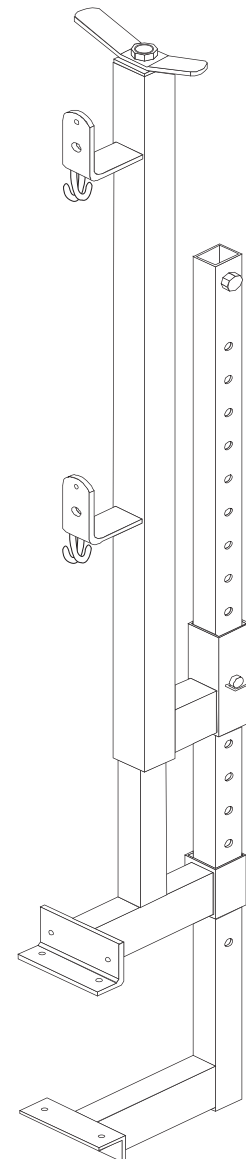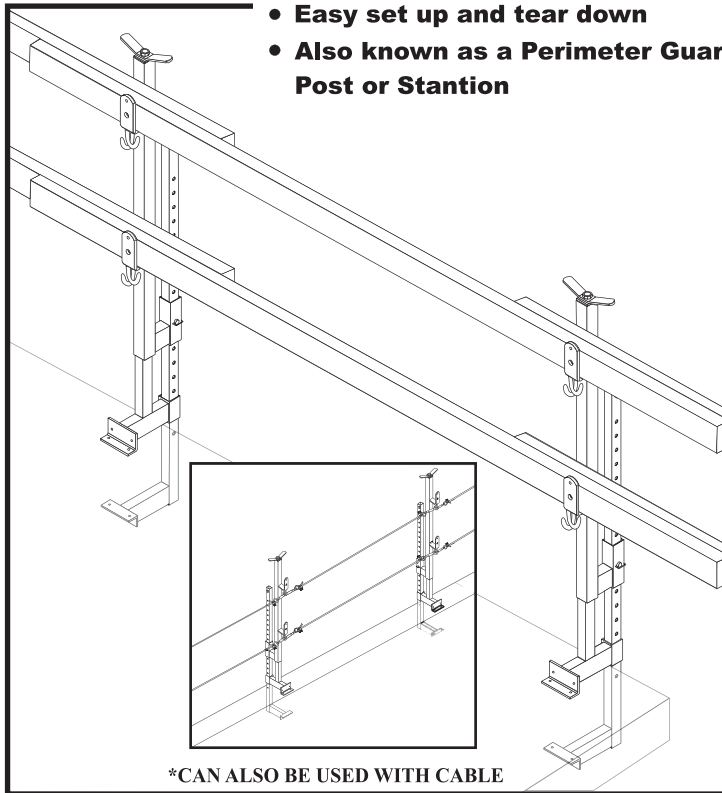

Specifications

Part Number	Description	Weight (lbs.)
SH-SG	Adj. Perimeter Guard Rail Post	32 lbs.

The Slab Grabber meets and/or exceeds all requirements set forth in OSHA Standards for the Construction Industry, 29 CFR Part 1926.502 (b) in relation to Guardrail systems. These standards, to summarize, state that top edge height of top rails shall be 42 inches plus or minus 3 inches above the working surface, and mid-rail height shall be within 21 inches plus or minus 3 inches above the working surface. In addition, the requirement states that the Top rail must be capable of withstanding a 200 pound force in any outward or downward direction, and mid-rail must be capable of withstanding a 150 pound force in any outward or downward direction. The slab Grabber is not to be spaced horizontally more than 8 feet.